



PRESSURE

TFT Technology

PMI Technology

P2P Technology

PRIGNITZ 
MIKROSYSTEMTECHNIK

PMP-C200-MOD

Pressure sensors Series with RS485 MODBUS RTU Interface
(based on the C200 new Series)

Datasheet

- **HIGH MEDIA RESISTANCE, NO INTERNAL SEALS, WITHOUT WELD SEAM**
- **SIGNAL CONDITIONING WITH μ C**
- **HIGH INTEGRATION DENSITY**
- **VACUUM-TIGHT AND ELASTOMER-FREE**
- **FLEXIBLE FOR CUSTOMISED REQUIREMENT**

MAIN FEATURE

- **Pressure ranges***: from 0 mbar...20 mbar to -1...2000 bar
- **Mechanical connections***: 1/2"-14 NPT; 1/4"-18 NPT; G1/4"B Mano EN 837; G1/2"B Mano EN 837; G1/4"A Form E; 7/16 - 20UNF
- **Electrical connections***: M12x1(S763); Cable output; Deutsch DT04-4P
- **Wetted parts****: stainless steel 1.4404 (316L)/17-4
- **Response time****: typ 1 ms
- **Accuracy (25°C)**: ≤ 0.2 % FS after limit-point calibration
- **Output** : RS485 MODBUS RTU



Example of product

* others on request. Different special custom-made solutions
** depend of CIT product-version

DESCRIPTION

Pressure transducer for an application with high and very high accuracy requirements over a wide temperature range in industries, especially chemical, hydraulic, food, and pharmacy, etc. In the version with P2P Technology sensor can be applicable with the chemical and physical properties of hydrogen. Pressure cells from -1...2000 bar are available for different fields of use. Signal processing of the measurement bridge is affected by a microprocessor for compensation pressure cell characteristics well. The CIT allows a zero point correction, a range changing, and measurement filtering with an additional service box and PC-Software

APPLICATIONS



ENERGY TECHNOLOGY



INDUSTRIAL PROCESS CONTROL
Chemical, Pharma, Food



INDUSTRIAL AUTOMATION
Test stands, CNC equipment, Presses, HVAC



GAS INDUSTRY



HVAC
Heating, Ventilation, Air conditioning



CHEMICAL INDUSTRY

TECHNICAL SPECIFICATIONS

INPUT PARAMETERS

Pressure ranges (bar) *												
Nominal pressure	0,1	0,16	0,25	0,4	0,6	1	1,6	2,5	4	6	10	
Over pressure	1	1,5	2	2	4	5	10	5	8	12	20	
Burst pressure	2	3	4	4	8	10	15	10	12	18	30	
Pressure ranges (bar) *												
Nominal pressure	4	6	10	16	25	40	60	100	160	250	400	600 1000 2000
Over pressure	8	12	20	32	50	80	120	200	320	500	800	1200 1400 2200
Burst pressure	12	18	30	48	75	120	180	500	750	1000	1400	1800 2000 2500
Pressure type	gauge, sealed reference, absolute											
Mechanical connections *	9/16-18UNF 6M; 1/2"-14 NPT; 1/4"-18 NPT; G1/4"B Mano EN 837; G1/2"B Mano EN 837; G1/4"A Form E; 7/16 - 20UNF											
Tightening torque	typ. 25 Nm; max. 50 Nm											
Wetted parts	stainless steel 316L / 17-4 PH											
Body material	stainless steel											

OUTPUT SIZES

Electrical connections *	M12x1(S763); Cable output; Deutsch DT04-4P
Supply voltage	10 ... 32 VDC
Supply Current	< 10 mA
Output	RS485 MODBUS RTU
Output Span	10000 Digits Integer
Output by offset	0 Digit Integer
Output by nominal Pressure	10000 Digits Integer
Response time**	typ. 1 ms
Baud rate	from 2400 to 115200 configurable
Temperatur Measuring in °C	Yes
Pressure Measuring in bar	Yes
Command Description	Please refer to Protocol Descriptipon Dokument

PERFORMANCE CHARACTERISTICS

Accuracy (25°C)	≤ ±0.2 % FS after limit-point calibration
Overall accuracy (- 5°C... 85°C)	≤ ±0.1 % FS / 10 K after limit-point calibration
Long-term stability	≤ 0.1 % FS per year in referential conditions
Ambient temperature	- 40...+ 85°C
Medium temperature	- 40...+ 125°C
Storage temperature	- 40...+ 85°C
Shock resistance	1000 g to IEC 60068-2-32
Vibration resistance	20 g to IEC 60068-2-6
Protection class	depending on electrical connection, see drawing of electrical connectors


*others on request

** depend of product

ELECTRICAL PROTECTION	
Reverse polarity	YES
Dielectric strength	50 V DC
Short-circuit protection	KS Out+ / UB- (for 1s)
CE-CONFORMITY	
EMV guideline	2014 / 30 / EU acc. to DIN EN 61326-1, DIN EN 61326-2-3
RoHS guideline	2011/65/EU
OTHER	
Weight	depending on electrical connection
Lifetime cycles	> 100 million


ELECTRICAL CONNECTION *

M12x1 (S763)

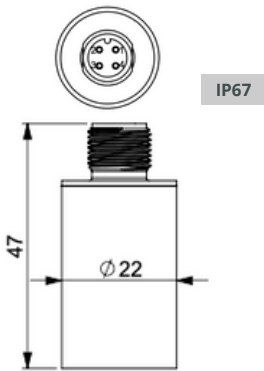


Pin1	Pin2	Pin3	Pin4
+	B- (RS485 B)	-	A+ (RS485 A)

Deutsch DT04-4P



Pin1	Pin2	Pin3	Pin4
+	B- (RS485 B)	-	A+ (RS485 A)

Cable output

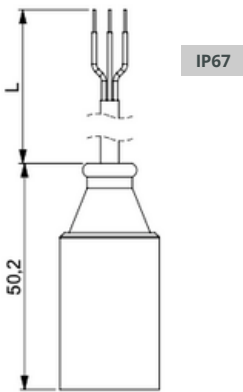


Red	White	Black	Green
+	B- (RS485 B)	-	A+ (RS485 A)

*others on request

PROCESS CONNECTIONS

All dimensions in mm

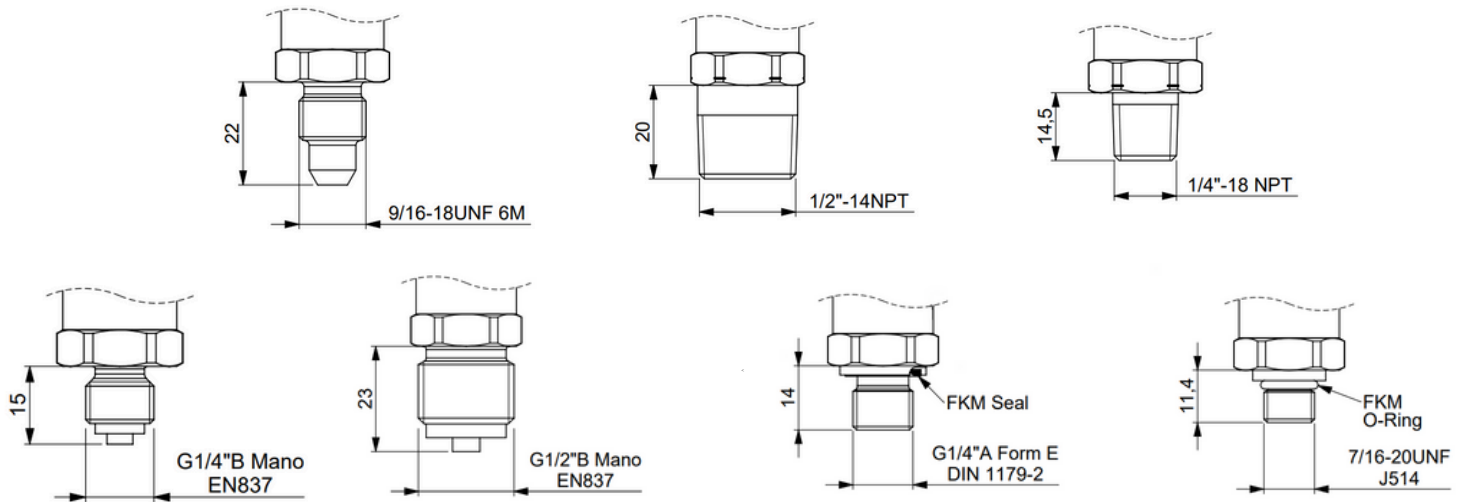

CUSTOMIZED SOLUTIONS

An indisputable advantage of the products from Prignitz Mikrosystemtechnik is that in addition to the specified parameters, a variety of specific customer requests can be implemented:

- EX versions are available for use in hazardous areas (ATEX, IECEx, CSA)
- other process and electrical connections available in a wide range of options
- analog output signals can be customized upon request.

Feel free to ask us. We are ready to implement individual solutions for you.

*others on request



Before installation and operation, ensure that the appropriate pressure sensor has been selected in terms of pressure range, design and specific measuring conditions. Non compliance can result in serious injury and/or damage to the equipment.

WARNING: Prignitz Mikrosystemtechnik reserve the right to modify their products without notice. It is imperative that we should be consulted over any particular use or application of our products and it is the responsibility of the buyer to establish, particularly through all the appropriate testes, that the product is suitable for the use or application. Under no circumstances will our warranty apply, nor shall we be held responsible for any application (such as any modification, addition, deletion, use in conjunction with other electrical or electronic components, circuits or assemblies, or any other unsuitable material or substance) which has not been expressly agreed by us prior to the sale of our products.

APPROVALS CERTIFICATE

CE Compliance: EMC directive 2014 / 30 / EU according in EN 61326-2-3

RoHS guideline: 2011/65/EU

Approved according to the European Directive EC79/2009

PRIGNITZ-Mikrosystemtechnik GmbH is certified acc. to ISO 9001. We offer a multitude of products compliant with ATEX, IECEx, CSA, and other worldwide relevant qualifications.



TRANSPORT, PACKAGING AND STORAGE

Transport

Check the pressure transmitter for any damage that may have been caused during transportation. Obvious damage must be reported immediately.

Packaging and storage

Do not remove packaging until just before mounting.

Keep the packaging as it will provide optimum protection during transport (e.g. change in installation site, sending for repair).

Permissible conditions at the place of storage:

- Storage temperature: -40 ... +85 °C

DISMOUNTING, RETURN AND DISPOSAL

Dismounting

Physical injuries and damage to property and the environment caused by hazardous media. Upon contact with hazardous media (e.g. oxygen, acetylene, flammable or toxic substances), harmful media (e.g. corrosive, toxic, carcinogenic, radioactive), and also with refrigeration plants and compressors, there is a danger of physical injuries and damage to property and the environment.

- Should a failure occur, aggressive media with extremely high temperature and under high pressure or vacuum may be present at the instrument.
- Wear the requisite protective equipment.

Dismounting the instrument

- Depressurise and de-energise the pressure transmitter.
- Disconnect the electrical connection.
- Unscrew the pressure transmitter with a spanner using the spanner flats.

Return

Strictly observe the following when shipping the instrument:

All instruments delivered to Prignitz Mikrosystemtechnik must be free from any kind of hazardous substances (acids, bases, solutions, etc.) and must therefore be cleaned before being returned.

HOW TO ORDER *

PMP-C2XX-MOD-(XX..XX)-XX-XX-XXX-XX-XXX

FAMILIES

C = CIT family

TECHNOLOGY & MATERIAL

11 = TFT Technology with stainless steel 17/4

22 = P2P Technology with stainless steel 1.4404 (316L)

31 = PMI Technology with steel 316 L, membrane inside

32 = PMI Technology with steel 316 L, flush membrane

ELECTRICAL OUTPUT

MOD = RS485 MODBUS RTU

PRESSURE RANGES

e.g.
(0...500)
(0...10)

UNIT

01 = bar
16 = psi

TYPE OF PRESSURE

g = gauge
S = sealed reference
a = absolute

**Customised
Article number**

ELECTRICAL CONNECTION

05 = M12 / 4 pins (Binder S763)
10 = DEUTSCH DT04-4P (4 pins)
c0 = Cable

SNUBBER

S = snubber
N = no snubber

PROCESS CONNECTIONS

00 = Customised
01 = G 1/4" Form E
02 = G 1/4" Form A
04 = G 1/2"
05 = G1/2" B Mano
07 = 1/2" NPT
08 = 1/4" NPT
09 = 7/16-20 UNF 2A
10 = 9/16" UNF
11 = 3/8" UNF
13 = M12 x1
17 = M18 x 1,5
18 = M20 x 1,5 manometer port
19 = G1/4 manometer port


* customisation available on request

PRIGNITZ


MIKROSYSTEMTECHNIK



PRESSURE



LEVEL



TEMPERATURE



CALIBRATION &
SERVICE

© 2025 PRIGNITZ Mikrosystemtechnik GmbH
All rights reserved. / Alle Rechte vorbehalten.

CONTACTS:

Tel.: **+49 (0) 38 77 / 5 67 46-0**

Fax: **+49 (0) 38 77 / 5 67 46-18**

Margarethenstraße 61

19322 Wittenberge / Elbe

Germany

info@prignitz-mst.de