



PRESSURE

P2P Technology

# PMP-S221

**SPT Family: Standard Pressure Transmitters**

**OEM pressure transmitter for**

**high overpressure pressure and aggressive media application**

**DATASHEET**

- **COMPACT DESIGN, HIGH INTEGRATION DENSITY**
- **HIGH MEDIA RESISTANCE, NO INTERNAL SEALS, WITHOUT WELD SEAM**
- **DIAGNOSTIC FUNCTION BASED ON THE OUTPUT SIGNAL (OPTIONAL)**
- **APPLICABLE FOR HIGH OVERPRESSURE**
- **CUSTOMIZING POSSIBLE**
- **FOR HIGH QUANTITIES MOQ 500**

## MAIN FEATURE

- **pressure ranges:** 10 to 5000 bar [150psi to 37.500 psi]
- **mechanical connections:** G1/4"A Form E, DIN EN ISO1179-2; 1/4"-18 NPT; 7/16-20 UNF SAE J514
- **electrical connections:** M12x1 (S763-4) (plastic), Packard Metri-Pack, DEUTSCH DT 04-3P, DEUTSCH DT 04-4P, AMP Superseal
- **wetted parts:** 17-4PH (1.4542)
- **response time:** typ. 1 ms
- **accuracy:**  $\leq 0.5\%$  FSO

## DESCRIPTION



The piezoresistive, very compact pressure transmitters from SPT-Family (without oil reservoir) is **based on a new type of two-chip technology (P2P Technology - our patented development), which enables the highest demands on robustness and performance such as stability, vibration, and shock resistance.**

It was specially designed for OEM series use in harsh environmental conditions, such as those that prevail in the off-road sector (Vehicles and Machines in Construction, Mining, Farming, Military etc). Compared to conventional machine building, the field of mobile equipment has more demanding requirements, particularly with regard to resistance to overpressure, vibration and shock, as well as increased EMC performance. The pressure sensors PMP-S221 were specially optimized for this and are therefore a robust solution for one of the sensor types most frequently used in mobile equipment.

All manufacturing steps from packaging in modern clean rooms to final calibration take place in Prignitz Mikrosystemtechnik in Germany.

## APPLICATIONS



**INDUSTRIAL AUTOMATION**  
Test stands, CNC equipment,  
Presses, HVAC



**RENEWABLE ENERGY**  
Oil, Gas, Wind, Water,  
Power stations



**INDUSTRIAL PROCESS CONTROL**  
Chemical, Pharma, Food



**OFF HIGHWAY MOBILE EQUIPMENT**  
Vehicles and Machines in Construction,  
Mining, Farming, Military



**TRANSPORTATION**  
Trucks, Busses, rail, Road  
Construction Machines



**MARINE & OFFSHORE**  
Engines, Hydraulic, Fluidhandling

# TECHNICAL SPECIFICATIONS

## INPUT PARAMETERS

Pressure ranges (in bar) *											
Nominal pressure	10	16	25	40	60	100	160	250	400	600	1000
Over pressure	50	100	100	160	600	600	600	1200	1200	2000	2000
Burst pressure	100	200	200	300	1000	1000	1000	2000	2000	2500	2500
Pressure ranges (in psi) *											
Nominal pressure	150	240	375	600	900	1500	2400	3750	6000	9000	15000
Over pressure	750	1500	1500	2400	9000	9000	9000	18000	18000	30000	30000
Burst pressure	1500	3000	3000	4500	15000	15000	15000	30000	30000	37500	37500
Pressure type	gauge, sealed reference (>60 bar)										
Mechanical connections	G1/4"A Form E, DIN EN ISO1179-2; 1/4"-18 NPT; 7/16-20 UNF SAE J514; 9/16-18 UNF										
Tightening torque	typ 25 Nm; max 50 Nm										
Wetted parts	17-4PH (1.4542)										
Body material	stainless steel 1.4301/AISI 304										

## OUTPUT SIZES

Electrical connections	Packard Metri-Pack, M12x 1 (S763) (plastic), Deutsch DT04-3P, Deutsch DT04-4P, AMP Superseal		
Output signal**	4...20 mA	1...5 V	ratiometric 0.5...4.5 V
Supply voltage	10...32 V	7...32 V	ratiometric 5 V DC+-10 %
Load resistance	< (Vsupply - 10)V/0.02 A	≥ 2 kOhm	≥ 2 kOhm
Response time	typ. 1 ms    max. 2 ms		

## PERFORMANCE CHARACTERISTICS

Accuracy (25°C)	≤ 0.5 % FSO
Overall accuracy (- 5°C... 85°C)	≤ 1.50 % FSO
Long-term stability	≤ 0.1 % FS per year in referential conditions
Ambient temperature	- 40...+ 105°C
Medium temperature	- 40...+ 125°C
Storage temperature	- 40...+ 125°C
Shock resistance	1000 g to IEC 60068-2-32
Vibration resistance	20 g to IEC 60068-2-6
Protection class	depending on electrical connection, see drawing of electrical connectors

## ELECTRICAL PROTECTION

Reverse polarity	yes
Dielectric strength	HV 350 V DC
Short-circuit strength	KS Out+ / UB- (for 1s)

## CE-CONFORMITY

EMV guideline	2014 / 30 / EU acc. to DIN EN 61326-1, DIN EN 61326-2-3
RoHS guideline	2011/65/EU

## OTHER

Weight	~ 50 g
Lifetime	> 10 million load cycles


\* Other on request

\*\* Output is calibrated at zero and full scale

# ELECTRICAL CONNECTION


Other pinouts on request

## Packard Metri-Pack




IP 67

< 50 bar IP 65

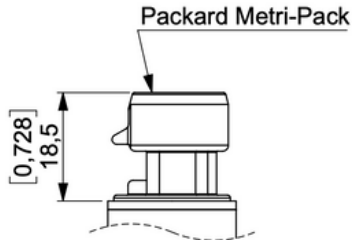


	PinA	PinB	PinC
0.5 -4.5 V; 1-5V	-	+	V/I out
4-20 mA	-	+	nc

## Binder M12x1 (S763-4)




IP 67

< 50 bar IP 65

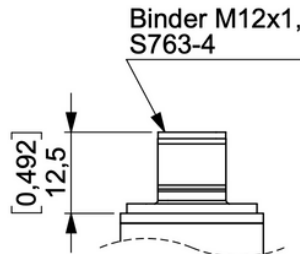


	Pin1	Pin2	Pin3	Pin4
0.5 -4.5 V; 1-5V	+	V/I out	-	nc
4-20 mA	+	nc	-	nc

## DT04-3P



IP 67

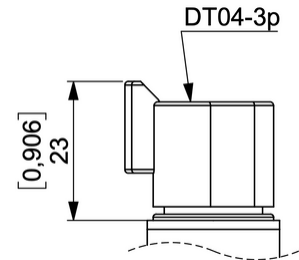


	PinA	PinB	PinC
0.5 -4.5 V; 1-5V	+	-	V/I out
4-20 mA	+	-	nc

## DT04-4P




IP 67

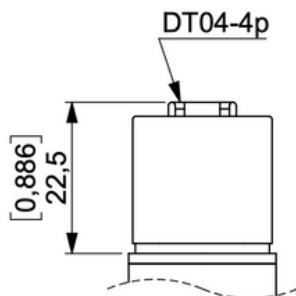


	Pin1	Pin2	Pin3	Pin4
0.5 -4.5 V; 1-5V	-	+	nc	V/I out
4-20 mA	-	+	nc	nc

## AMP Superseal



IP 67


< 50 bar IP 65

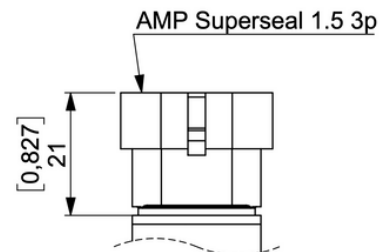


	PinA	PinB	PinC
0.5 -4.5 V; 1-5V	V/I out	-	+
4-20 mA	nc	-	+

## PROCESS CONNECTIONS (EXAMPLES)


Contact us for other connections. We can realise different special customized solutions

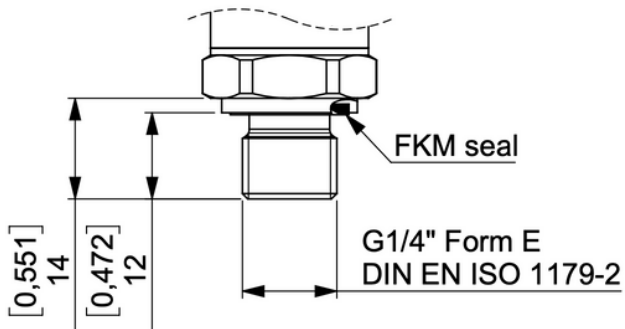


G1/4" A Form E

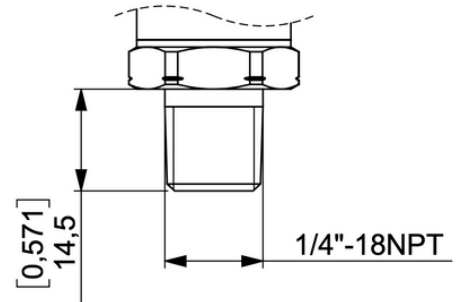

1/4"-18 NPT

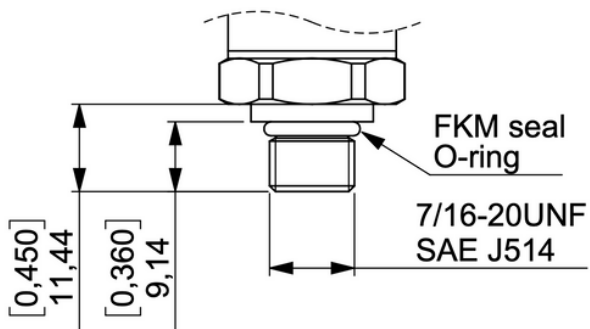


7/16-20 UNF

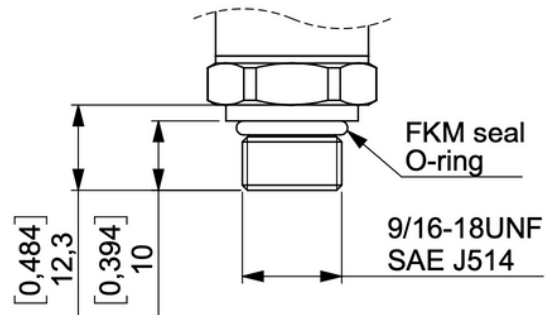

9/16-18 UNF

## PRODUCT CONSTRUCTION

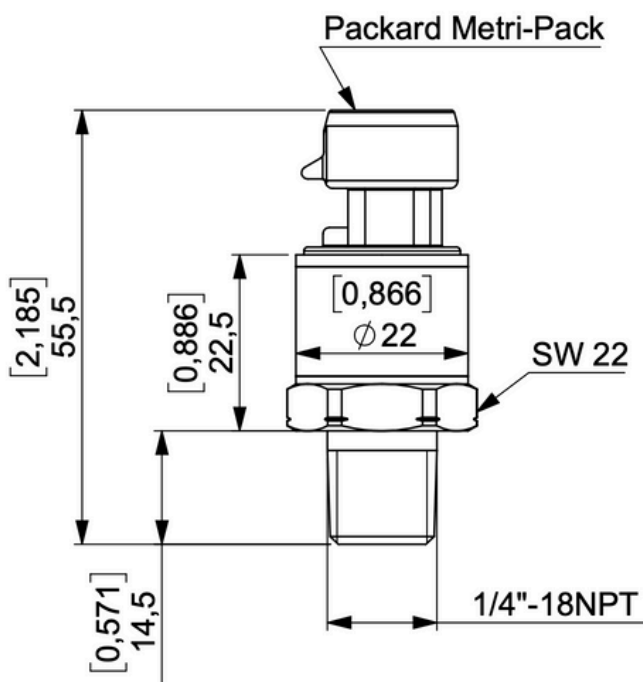



Before installation and operation, ensure that the appropriate pressure sensor has been selected in terms of pressure range, design and specific measuring conditions. Non compliance can result in serious injury and/or damage to the equipment.

**WARNING:** Prignitz Mikrosystemtechnik reserve the right to modify their products without notice. It is imperative that we should be consulted over any particular use or application of our products and it is the responsibility of the buyer to establish, particularly through all the appropriate tests, that the product is suitable for the use or application. Under no circumstances will our warranty apply, nor shall we be held responsible for any application (such as any modification, addition, deletion, use in conjunction with other electrical or electronic components, circuits or assemblies, or any other unsuitable material or substance) which has not been expressly agreed by us prior to the sale of our products.

## APPROVALS CERTIFICATE

CE Compliance: EMC directive 2014 / 30 / EU according to EN 61326-2-3

RoHS guideline: 2011/65/EU

PRIGNITZ-Mikrosystemtechnik GmbH is certified acc. to ISO 9001. We offer a multitude of products compliant with ATEX, IECEx, CSA, and other worldwide relevant qualifications.



## CUSTOMIZED SOLUTIONS

An indisputable advantage of the products from Prignitz Mikrosystemtechnik is that in addition to the specified parameters, a variety of specific customer requests can be implemented:

- EX versions are available for use in hazardous areas (ATEX, IECEx, CSA)
- other process and electrical connections available in a wide range of options
- analog output signals can be customized upon request.

Feel free to ask us. We are ready to implement individual solutions for you.

## TRANSPORT, PACKAGING AND STORAGE

### Transport

Check the pressure transmitter for any damage that may have been caused during transportation. Obvious damage must be reported immediately.

### Packaging and storage

Do not remove packaging until just before mounting.

Keep the packaging as it will provide optimum protection during transport (e.g. change in installation site, sending for repair).

Permissible conditions at the place of storage:

- Storage temperature: -40 ... +125 °C

## DISMOUNTING, RETURN AND DISPOSAL

### Dismounting

Physical injuries and damage to property and the environment caused by hazardous media. Upon contact with hazardous media (e.g. oxygen, acetylene, flammable or toxic substances), harmful media (e.g. corrosive, toxic, carcinogenic, radioactive), and also with refrigeration plants and compressors, there is a danger of physical injuries and damage to property and the environment.

- Should a failure occur, aggressive media with extremely high temperature and under high pressure or vacuum may be present at the instrument.
- Wear the requisite protective equipment.

### Dismounting the instrument

- Depressurise and de-energise the pressure transmitter.
- Disconnect the electrical connection.
- Unscrew the pressure transmitter with a spanner using the spanner flats.

### Return

Strictly observe the following when shipping the instrument:

All instruments delivered to Prignitz Mikrosystemtechnik must be free from any kind of hazardous substances (acids, bases, solutions, etc.) and must therefore be cleaned before being returned.

Edition version: [D/S221/Rev.2/April.2025/ENG](#)

## HOW TO ORDER

# PMP-S221-XX-(XX..XX)-XX-X-XXX-XX-XXX

### FAMILIES

**S** = SPT Family

### TECHNOLOGY & MATERIAL

**21** = P2P Technology with stainless steel

### ELECTRICAL OUTPUT

**I2** = 4...20 mA  
**1U5** = 1...5 V  
**UR** = ratiometric

### PRESSURE RANGES

e.g.  
**(0...500)**  
**(0...10)**

### UNIT

**01** = bar  
**16** = psi

### TYPE OF PRESSURE

**g** = gauge  
**S** = Sealed reference

Customised  
Article number

### ELECTRICAL CONNECTION

**01** = Packard Metri-Pack  
**04** = M12x1 (plastic); 4P  
**09** = DT 04-3P  
**10** = DT 04-4P  
**11** = AMP Superseal

### SNUBBER

**S** = snubber  
**N** = no snubber

### PROCESS CONNECTIONS


**00** = customized  
**01** = G1/4"A form E  
**08** = 1/4"-18 NPT  
**09** = 7/16-20 UNF  
**10** = 9/16-18 UNF

# PRIGNITZ


## MIKROSYSTEMTECHNIK



PRESSURE



LEVEL



TEMPERATURE



CALIBRATION &  
SERVICE

© 2025 PRIGNITZ Mikrosystemtechnik GmbH  
All rights reserved. / Alle Rechte vorbehalten.

### CONTACTS:

Tel.: **+49 (0) 38 77 / 5 67 46-0**

Fax: **+49 (0) 38 77 / 5 67 46-18**

Margarethenstraße 61  
19322 Wittenberge / Elbe  
Germany

**[info@prignitz-mst.de](mailto:info@prignitz-mst.de)**