



TEMPERATURE

STT-Family (Standard temperature transmitters Family)

PMT-S112-H

FOR HYDROGEN Applications

Datasheet

These are stainless steel, safe temperature transmitters. In addition to its rugged construction and a good price- to- performance ratio this series will be the solution for temperature measurement for Hydrogen applications.

MAIN FEATURE


- Hi- strength stainless steel construction
- Wide operating measuring range: -40 °C ... 200 °C (-40 °F ... 392 °F)
- Material: Stainless Steel 316L
- Low static and thermal errors
- Compatible for Hydrogen applications
- High grade of EMI/RFI protection grade
- Several electrical connections available



APPLICATION



GAS TECHNOLOGY



FUEL CELLS



REMOTE PROCESS CONTROL



HYDROGEN APPLICATIONS


TECHNICAL SPECIFICATIONS

INPUT PARAMETERS			
Mechanical connections *	G1/4 Form E, 1/4"-18NPT, 7/16"-20 UNF, 9/16"-18 UNF		
Temperature tip*	stainless steel tip with diameter 6 mm (0.24") 10 mm ... 500 mm (0.4" ... 1.64 ft)		
Wetted parts	stainless steel 316L		
Body material	stainless steel		
Max.operating pressure	static 160 bar		
Media temperature range	- 40 °C ... 200 °C (-40 °F ... 392 °F)		
Measuring element	1 x PT100, class B		
OUTPUT SIZES			
Electrical connections *	EN 175 301-803-A /-C; M12x1 (Binder S763); Deutsch DT04-3P; Packard Metri-Pack; cable outlet;		
Output signal	4 ... 20 mA	0/1 ... 5 V DC; 0/1 ... 6 V DC; 0/1 ... 10 V DC	0,5 ... 4,5 V DC ratiometric
Supply voltage (DC)	10 ... 32 V	8 ... 32 V (Vout x ... 5 V) 10 ... 32 V (Vout x ... 6 V) 14 ... 32 V (Vout x ... 10 V)	5 V DC +/- 5 %
Load resistance	< (Vcc-10 V)/20 mA	> 5 kOhm	> 2,5 kOhm
Current consumption	< 22 mA	typ. 10 mA	typ. 10 mA
Performance Characteristics			
Accuracy (25°C)	+/- 1 % FS		
Overall accuracy	+/- 2 % Fs		
Long-term stability	±0.1 % FS per year in referential condition		
Ambient temperature	- 40 °C ... 125 °C (- 40 °F ... 257 °F)		
Storage temperature	- 40 °C ... 125 °C (- 40 °F ... 257 °F)		
Shock resistance	EN/IEC 60068-2-32 (1 m free fall)		
Vibration resistance	20 g / 3 axes to EN/IEC 60068-2-6		
Protection class	depending on electrical connection, see drawing of electrical connectors		
EMI/RFI emmission	EN 61326-1:2013-section 7		
	EN 61326-2-3:2013		
EMI/RFI susceptibility	EN 61326-1:2013 - section 6		
	EN 61326-2-3:2013		
Overvoltage Protection	yes		
Reverse Protection	yes		

*others on request


ELECTRICAL CONNECTION

EN 175 301-803-A

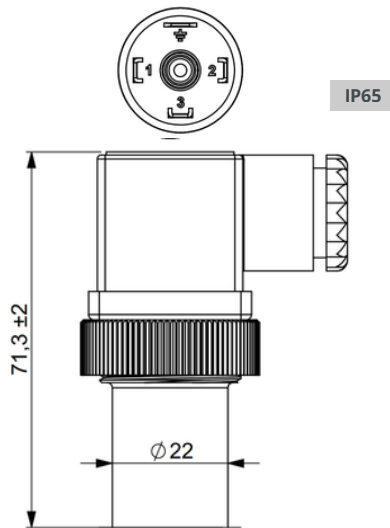


Output	Pin1	Pin2	Pin3
Volt	+	-	Vout
mA	+	-	nc

EN 175 301-803-C

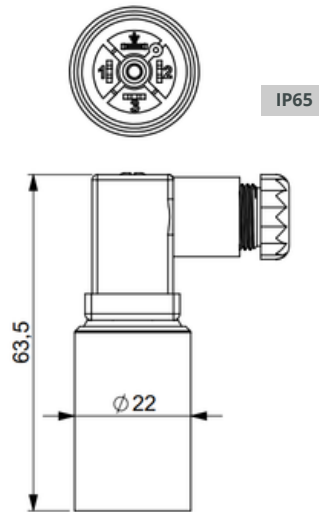


Output	Pin1	Pin2	Pin3
Volt	+	-	Vout
mA	+	-	nc

M12x1 (S763)

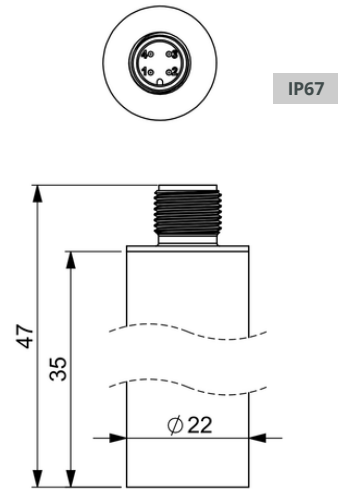


Output	Pin1	Pin3	Pin4
Volt	+	-	Vout
mA	+	-	nc

Deutsch DT04-3P

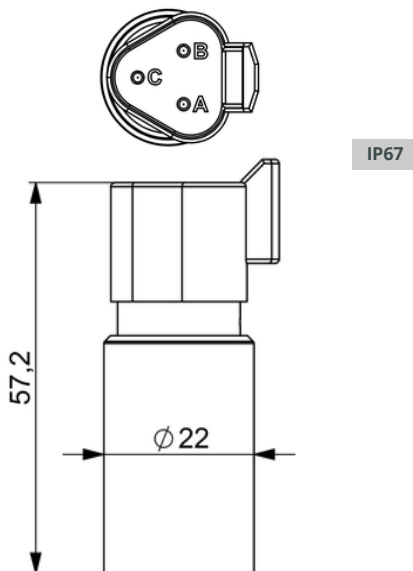


Output	PinA	PinB	PinC
Volt	-	+	Vout
mA	-	+	nc

Packard Metri-Pack

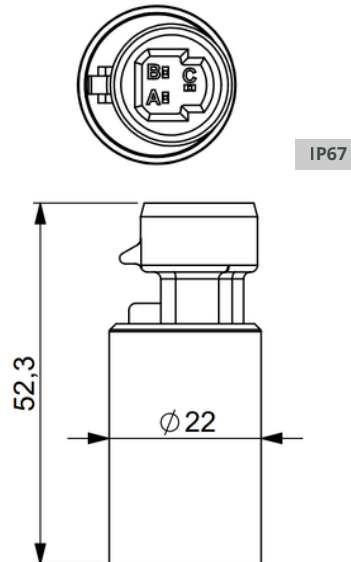





Output	PinA	PinB	PinC
Volt	-	+	Vout
mA	-	+	nc

Cable

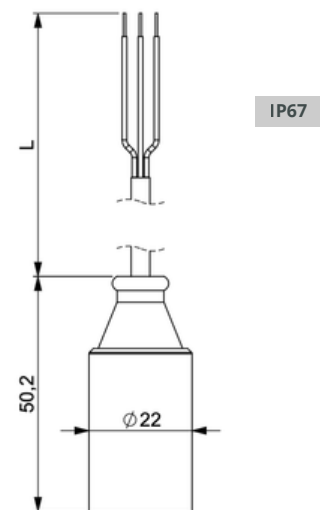

Output	Red	Black	White
Volt	+	-	Vout
mA	+	-	nc

PROCESS CONNECTION

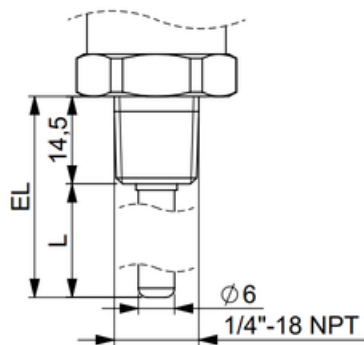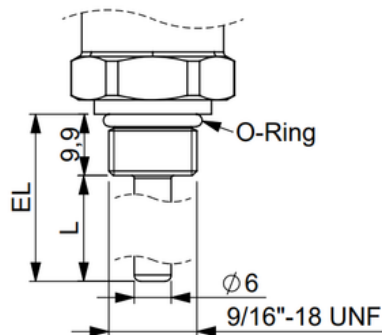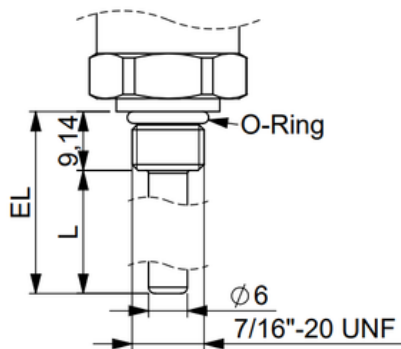

EL: installation length
L: tip length



Before installation and operation, ensure that the appropriate temperature sensor has been selected in terms of temperature range, design and specific measuring conditions. Non compliance can result in serious injury and/or damage to the equipment.

WARNING: Prignitz Mikrosystemtechnik reserve the right to modify their products without notice to customers. It is imperative that we should be consulted over any particular use or application of our products and it is the responsibility of the buyer to establish, particularly through all the appropriate testes, that the product is suitable for the use or application. Under no circumstances will our warranty apply, nor shall we be held responsible for any application (such as any modification, addition, deletion, use in conjunction with other electrical or electronic components, circuits or assemblies, or any other unsuitable material or substance) which has not been expressly agreed by us prior to the sale of our products.

CUSTOMIZED SOLUTIONS

An indisputable advantage of the products from Prignitz Mikrosystemtechnik is that in addition to the specified parameters, a variety of specific customer requests can be implemented:

- other process and electrical connections available in a wide range of options
- analog output signals can be customized upon request.

Feel free to ask us. We are ready to implement individual solutions for you.

APPROVALS CERTIFICATE

CE Compliance: EMC directive 2014 / 30 / EU according in EN 61326-2-3
RoHS guideline: 2011/65/EU

PRIGNITZ-Mikrosystemtechnik GmbH is certified acc. to ISO 9001. We offer a multitude of products compliant with ATEX, IECEx, CSA, and other worldwide relevant qualifications.



DISMOUNTING, RETURN AND DISPOSAL

Dismounting

Physical injuries and damage to property and the environment caused by hazardous media. Upon contact with hazardous media (e.g. oxygen, acetylene, flammable or toxic substances), harmful media (e.g. corrosive, toxic, carcinogenic, radioactive), and also with refrigeration plants and compressors, there is a danger of physical injuries and damage to property and the environment.

- Should a failure occur, aggressive media with extremely high temperature and under high pressure or vacuum may be present at the instrument.
- Wear the requisite protective equipment.

Dismounting the instrument

- Depressurise and de-energise the temperature transmitter.
- Disconnect the electrical connection.
- Unscrew the temperature transmitter with a spanner using the spanner flats.

Return

Strictly observe the following when shipping the instrument:

All instruments delivered to Prignitz Mikrosystemtechnik must be free from any kind of hazardous substances (acids, bases, solutions, etc.) and must therefore be cleaned before being returned.

TRANSPORT, PACKAGING AND STORAGE

Transport

Check the temperature transmitter for any damage that may have been caused during transportation. Obvious damage must be reported immediately.

Packaging and storage

Do not remove packaging until just before mounting.

Keep the packaging as it will provide optimum protection during transport (e.g. change in installation site, sending for repair).

Recommended conditions at the place of storage:

- 40 °C to 125 °C (- 40 °F ... 257 °F)

Edition version: D/PMT-S112-H/Rev.6/July.2026/ENG

HOW TO ORDER

PMT-S112-H-XX-(XX..XX)-XX-XXX-XX-XX

FAMILIES

S = STT Family

MEASURING ELEMENT

1 = PT100, class B

MATERIAL OF WETTED PARTS

2 = 316L

HYDROGEN

Suitable for Hydrogen applications

ELECTRICAL OUTPUT

I2 = 4 ... 20 mA 2L

UR = ratiometric

0U5 = 0 ... 5 V

1U5 = 1 ... 5 V

0U10 = 0 ... 10 V

TEMPERATURE RANGES

e.g.

-20 ... 150

-40 ... 85

0 ... 100

UNIT

19 = Celsius

20 = Fahrenheit

23 = Kelvin

ELECTRICAL CONNECTION

00 = customized

01 = Packard Metri-Pack

02 = MVS/A

03 = MVS/C

05 = M12x1 (S763-4)

09 = DT04-3P

C2 = Cable 4P

PROCESS CONNECTIONS

00 = customized

01 = G1/4"A form E

08 = 1/4"-18 NPT

33 = 7/16-20 UNF

10 = 9/16-18 UNF

TIP LENGTH

e.g.

5mm

0,2in

0,1ft

Please note that :

In mm:

min = 5mm

max=30 mm

In Inch

min = 0,2in

max= 1,18in

In Feet

min = 0,1ft

max= 0,098ft


Other upon request.

PRIGNITZ

MIKROSYSTEMTECHNIK



PRESSURE



LEVEL



TEMPERATURE



CALIBRATION &
SERVICE

© 2026 PRIGNITZ Mikrosystemtechnik GmbH
All rights reserved. / Alle Rechte vorbehalten.

CONTACTS:

Tel.: **+49 (0) 38 77 / 5 67 46-0**

Fax: **+49 (0) 38 77 / 5 67 46-18**

Margarethenstraße 61
19322 Wittenberge / Elbe
Germany

info@prignitz-mst.de